





Quick Start

DMG 3200/3100/3000 Digital Media Gateway

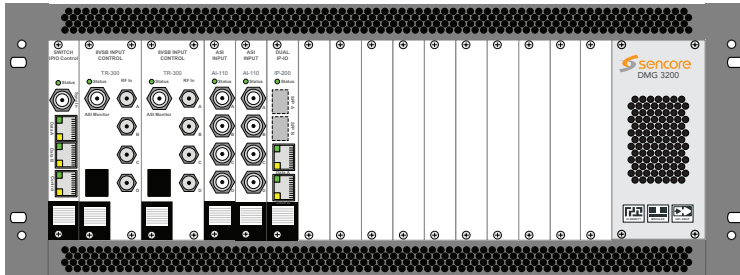


Congratulations on purchasing the DMG 3200/3100/3000. Follow these installation and configuration instructions to get started. If you need assistance, please contact Sencore Procure at (605) 978-4600 or procure@sencore.com


1 Contents

Unpack the DMG 3200/3100/3000 from the box and packaging materials it was shipped in. Verify all of the following items are present:

- DMG 3200/3100/3000 Digital Media Gateway

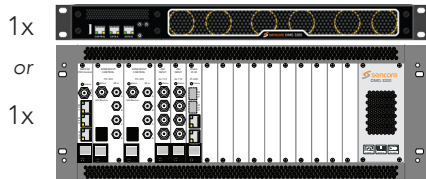

- Line Cord

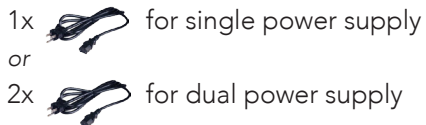


If any of these items are missing or damaged, please contact Sencore to obtain replacements.


The user manual can be downloaded from the DMG 3200 product page on our website: www.sencore.com.

2 Installation

1. Secure the DMG 3200/3100/3000 into the rack space.

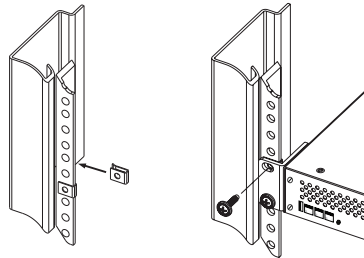

2. Make all appropriate I/O connections on the back of the unit.
3. Connect an Ethernet cable from a PC directly to the Ethernet port marked "Control" on the switch module.
4. Connect the line cord(s) to the power on the unit.

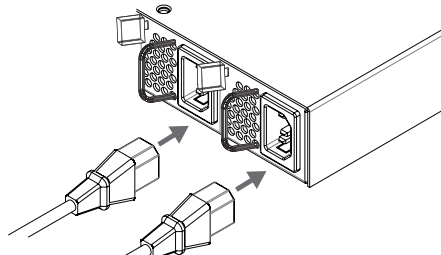

3 Management Port

The DMG 3200/3100/3000 can be managed through its web interface or SOAP XML. To use of the web GUI or SOAP XML, the management IP address must be configured. Contact your IT department if you are unsure of these settings.

Configuring Management IP address:

1. The DMG 3200/3100/3000 is shipped with a default IP address, subnet mask and default gateway.
IP Address: 192.168.1.100
Subnet Mask: 255.255.255.0
Gateway: 192.168.1.1
2. Set the IP address of the Ethernet adapter of the PC to a fixed address in the same subnet (e.g. 192.168.1.99).
3. Open a web-browser and type 192.168.1.100 in the address field.
4. Click on the "Admin" section on the left hand side of the screen.
5. Select the switch module installed in slot 0 or slot 17.
6. Enter the desired static IP address, subnet mask and gateway.
7. Click apply to save the changes.

Open a web browser (Mozilla Firefox 3.xx and above, Microsoft Internet Explorer 7.xx and above, Opera 9.xx and above or Google Chrome) and type: **<http://<IP Address>>** Default password is blank.