



Quick Start

DMG 1200 Digital Media Gateway



Congratulations on purchasing the DMG 1200. Follow these installation and configuration instructions to get started. Use the web interface for easiest configuration. If you need assistance please contact Sencore ProCare for technical assistance or visit sencore.com/support.

1 Contents


Unpack the DMG 1200 from the box and packaging materials it was shipped in. Verify all of the following items are present:

- DMG 1200 Digital Media Gateway
1x 
- Line Cords
2x 


If any of these items are missing or damaged, please contact Sencore to obtain replacements.

2 Installation

1. Secure the DMG 1200 into the rack space.

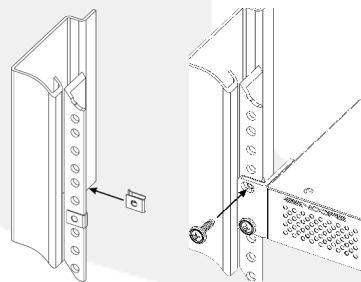







2. Make all appropriate I/O connections on the back of the unit.
3. Connect an Ethernet cable from a management network, to the Control port.
4. Connect the line cord(s).



3 Management Port









The DMG 1200 can be managed through its web interface or SNMP. To use the web interface or SNMP, the management IP address must be configured. Contact your IT department if you are unsure of these settings.

1. Press any button on the front panel
2. Use  and  to move the cursor to "Network Settings," then press  twice
3. Use  and  to move the cursor to "DHCP Mode," then press 

DHCP IP Address Setup:

1. Use  and  to set "DHCP Mode" to "Enabled" then press 

Static IP Address Setup:

1. Use  and  set "DHCP Mode" to "Disabled" then press 
2. Use  and  to select the column of the IP Address to edit and use  and  to change the values, then press 
3. Use the procedure in the previous step to set the Subnet Mask and Gateway.

Open a web browser (IE7 or above, Firefox 3.5 or above, or Chrome) and type:
`http://<IP Address>` Default password is mpeg101